



POTMIX ASPHALT BOILER  
& ASPHALT MATERIAL



# ASPHALT MACHINERY

## ASPHALT BOILER

Our unique combination of Potmix® Asphalt Boiler and heatable asphalt in granulates gives contractors the versatility to perform a variety of asphalt work. This working method ensures financial savings through more effective working hours, flexibility, and less material waste. All our hot asphalts are manufactured according to EU standards for guaranteed best results.

Hydrostatic drive and oil cooler for safer mixing.

Enhanced mixing system for block and granulate material.

Adjustable incline for effective mixing and discharging.

Double bottom for accurate indirect heating.



Electronic system control and thermostat



Electronic starting system and FeCuNi temperature sensor




Fork lift insertions for easy lifting

### OPTIONAL ADDITIONS:



Trailer

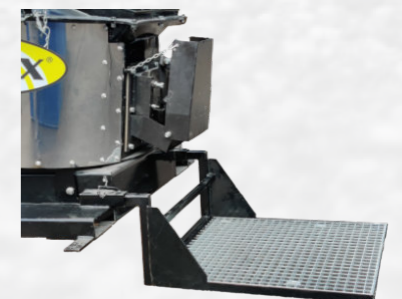

Work platform

Asphalt Boiler is available in these standard sizes:

Capacity litre	L*W*H cm (incl. frame)	Empty weight approx. kg
600	218*150*180	1 250
1200	360*250*280	2 500
2600	450*250*350	3 400





# ASPHALT MATERIAL

---

## ONE MACHINE - SEVERAL MATERIAL CHOICES




### AC 6 & 10

Unique close graded surface course.

In granulate form - delivered in 22 kg bag.

CE marked. Conforms to EN 13108-1 standard.

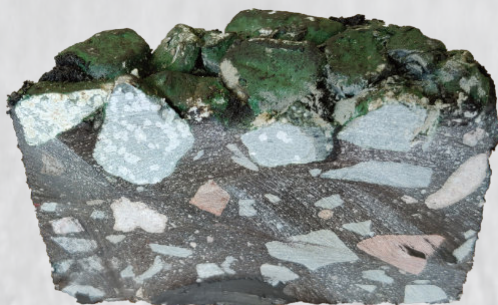

### HRA 30/14

Hot rolled asphalt for dense and extremely durable repairs. Used in combination with chipped aggregate in four colours - black, gray, red, green.



In granulate form - delivered in 22 kg bag + chippings 15 kg bucket.

CE marked. Conforms to EN 13108-4 standard.



### MASTIC ULTRA THIN

Unique mastic asphalt for  $\leq 2$  mm thin layers and filling of microtrenches etc.

In granulate form - delivered in 20 kg bag.

Conforms to EN 13108-6 standard.



POTMIX PRODUCTS AB  
BOX 14003 • 630 14 • ESKILSTUNA • SWEDEN  
INFO@POTMIX.COM • +46 10-101 80 33 • WWW.POTMIX.COM