



POTMIX ASPHALT BOILER & ASPHALT MATERIAL

ASPHALT MACHINERY

ASPHALT BOILER

Our unique combination of Potmix® Asphalt Boiler and heatable asphalt in granulates gives contractors the versatility to perform a variety of qualitative asphalt work. This working method also ensures financial savings through more effective working hours, flexibility, and less material waste. All our hot asphalts are manufactured according to EU standards for guaranteed best results.

Hydrostatic drive and oil cooler for safer mixing.

Enhanced mixing system for block and granulate material.

Adjustable incline for effective mixing and discharging.


Double bottom for accurate indirect heating.



Electronic system control and thermostat



Electronic starting system and FeCuNi temperature sensor

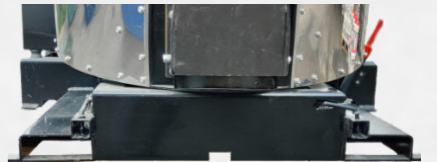


Fork lift insertions for easy lifting

OPTIONAL ADDITIONS:



Trailer

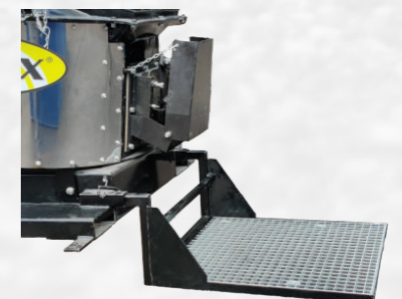

Work platform

Asphalt Boiler is available in these standard sizes:

Capacity litre	L*W*H cm (incl. frame)	Empty weight approx. kg
600	218 * 150 * 180	1 250
1200	360 * 250 * 280	2 500
2600	450 * 250 * 350	3 400



ASPHALT MATERIAL

ONE BOILER - SEVERAL MATERIAL CHOICES



AC 6 & 10

Unique close graded surface course allowing hot mix to be produced on site to demand.

In granulate form - delivered in 22 kg bag.

CE marked. Conforms to EN 13108-1 standard.



MASTIC FLEX

Asphalt mastic for dense and strong repairs. High polymer content for flexibility to counteract cracking.

In granulate form - delivered in 20 kg bag.

Conforms to EN 13108-6 standard.



MASTIC ULTRA THIN

Unique mastic asphalt for ≤ 2 mm thin layers and filling of microtrenches etc.

In granulate form - delivered in 20 kg bag.

Conforms to EN 13108-6 standard.



POTMIX PRODUCTS AB
BOX 14003 • 630 14 • ESKILSTUNA • SWEDEN
INFO@POTMIX.COM • +46 10-101 80 33 • WWW.POTMIX.COM